

A black, rectangular, rack-mountable device with two antennas. The front panel features a power button, status LEDs, a TF card slot, HDMI OUT and IN ports, a TYPE-C port, two USB 3.0 ports, a LAN port, and a RECOVERY button.

i3CONNECT Studio OPS

MAKING GOOD SCREENS GREAT AGAIN.

What do you do when your touchscreen's software becomes outdated, but the hardware is too good to discard? Simple, you add the Studio OPS to the dedicated OPS slot of your display, and you are good to go. This device immediately upgrades your experience to a recent Android version and gives full access to i3CONNECT Studio and its features.

EXTEND THE LIFETIME OF YOUR DISPLAYS

Prematurely replacing functional interactive displays creates unnecessary electronic waste and environmental impact. Make a more sustainable choice by extending their lifetime with the Studio OPS.




KEEP YOUR DISPLAY IN USE

- ✓ Add additional years to the lifetime of your displays
- ✓ Upgrade your experience while retaining your hardware
- ✓ Get more value from existing equipment

REDUCE ELECTRONIC WASTE

- ✓ Prevent functional displays from being discarded prematurely
- ✓ Make better use of resources already in circulation

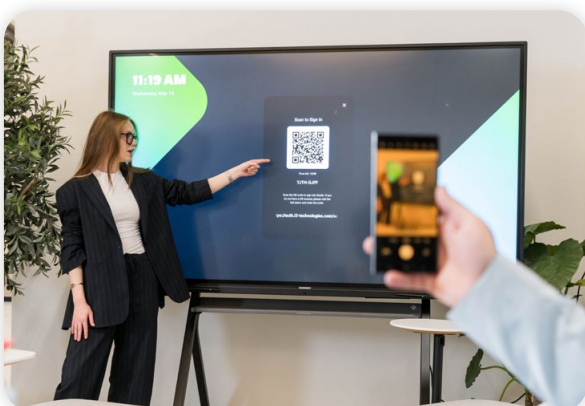

CHOOSE HOW TO INVEST

- ✓ Postpone display replacements
- ✓ Upgrade at a fraction of the cost of a new display
- ✓ Maximise your return on existing investments



SECURE YOUR DISPLAYS FOR YEARS TO COME

Outdated, unsupported interactive displays pose immense security risks.
Take control by upgrading your displays with the Studio OPS.



Fully supported Android version

- Upgrade outdated Android version of our older display
- Receive ongoing security updates
- Maintain compatibility with current apps via APK
- Extend the secure lifetime of your displays



Manage Studio OPS remotely with Cortex

- Push security updates
- Install and manage apps
- Transfer configurations
- Control access with role-based permissions



Security by Design with Studio

- Block unauthorised access with advanced restricted mode and background checks
- Set up PIN protection to prevent unwanted access
- Remove user data automatically when a guest session ends.

Supported Devices

The CTOUCH Riva 1, Laser Sky and Laser Nova are tested for compatibility with Studio OPS. This list will continue to grow in the future. Other devices using the OPS standard will likely work, but full compatibility is not tested and guaranteed.

ENJOY THE LATEST AND GREATEST!



Android 15

Enjoy a fully supported Android version.



OPS-based

Easily integrated into your display's OPS slot.




The best display is the one you already have

Extend the lifetime of your favourite screen with several years.




ONE FAMILIAR INTERFACE, NO MATTER WHICH ROOM YOU ARE IN

Upgrading your screen gives you access to the latest and greatest i3CONNECT software. This gives each screen in your organisation the exact same recognisable, easy to use interface and great software including:

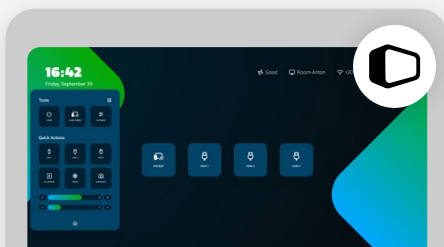


i3CONNECT Studio

A fully customisable interface that is extremely easy to use.

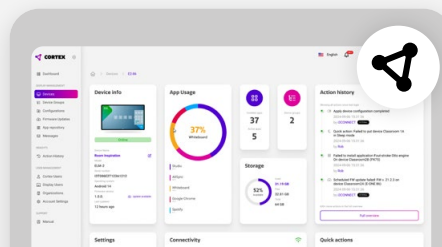

i3CONNECT Cortex

Our tool for remote management allowing IT admins full access to all devices.

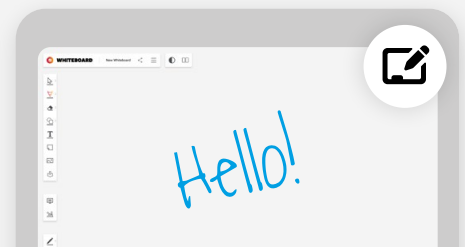

i3CONNECT Whiteboard

Our whiteboarding software allowing seamless collaboration across meetings and classes.

PRODUCT PROPERTIES

Model	i3CONNECT Studio OPS
Product ID	10011013

SUPPORTED DEVICES

Devices	CTOUCH Riva 1
	CTOUCH Laser Sky
	CTOUCH Laser Nova
Note	This list will continue to grow in the future. Other devices using the OPS standard will likely work, but full compatibility is not tested and guaranteed.

CONNECTIVITY

Video & Audio Input	1x HDMI - 4K@60Hz
	1x 3.5mm Mic-In
Video & Audio Output	1x HDMI - 4K@60Hz
	1x 80Pin OPS Connector - 4K@60Hz
	1x 3.5mm Headphone
USB Data Ports	4x Type A USB3.0
	1x Type C
Network Connectivity	1x LAN RJ-45 (10/100/1000 Mbps)
	Wifi 6
	Bluetooth 5.0

OPERATIONAL SPECIFICATIONS

Operating System	Android 15
Memory	8 GB RAM – 64 GB Storage
CPU	ARM Cortex-A76*4 & A55*4 (8 cores)
GPU	Mali-G610 MC4

ACCESSORIES

Included	Quick Start Guide
	Wireless Antennas

PHYSICAL PROPERTIES

Net Weight	0.8 kg
Packaged Weight	0.96 kg
Dimensions	119 x 180 x 30 mm
Package Dimensions	175 x 230 x 55 mm

ELECTRICAL PROPERTIES

Input Power	12 ~ 19V DC IN – 2.5/5.5 DC Jack & JAE 80P
--------------------	--

REGULATORY INFORMATION

Approvals / Certifications	CE, EMC, FCC, REACH, RoHS, RED-DA
-----------------------------------	-----------------------------------

SOFTWARE FEATURES

User Interface	i3CONNECT Studio
Whiteboarding Software	i3CONNECT Whiteboard
Annotation Software	i3CONNECT Annotate
Screensharing Software	AllSync / EShare (Optional)
App Store	i3CONNECT Store
Web Browser	Chromium
Update Support	OTA (Over the Air)
Device Management	i3CONNECT Cortex

ENVIRONMENTAL CONDITION


Operating Temperature	-5°C ~ 45°C
Operating Humidity	10% ~ 90% Non-Condensing
Storage Temperature	-20°C ~ 70°C
Storage Humidity	10% ~ 90% Non-Condensing

WARRANTY

Standard Warranty	2 Years from Shipment
--------------------------	-----------------------

NOTICE

This preliminary spec sheet may be subject to change.
No rights can be claimed from the content of this document.

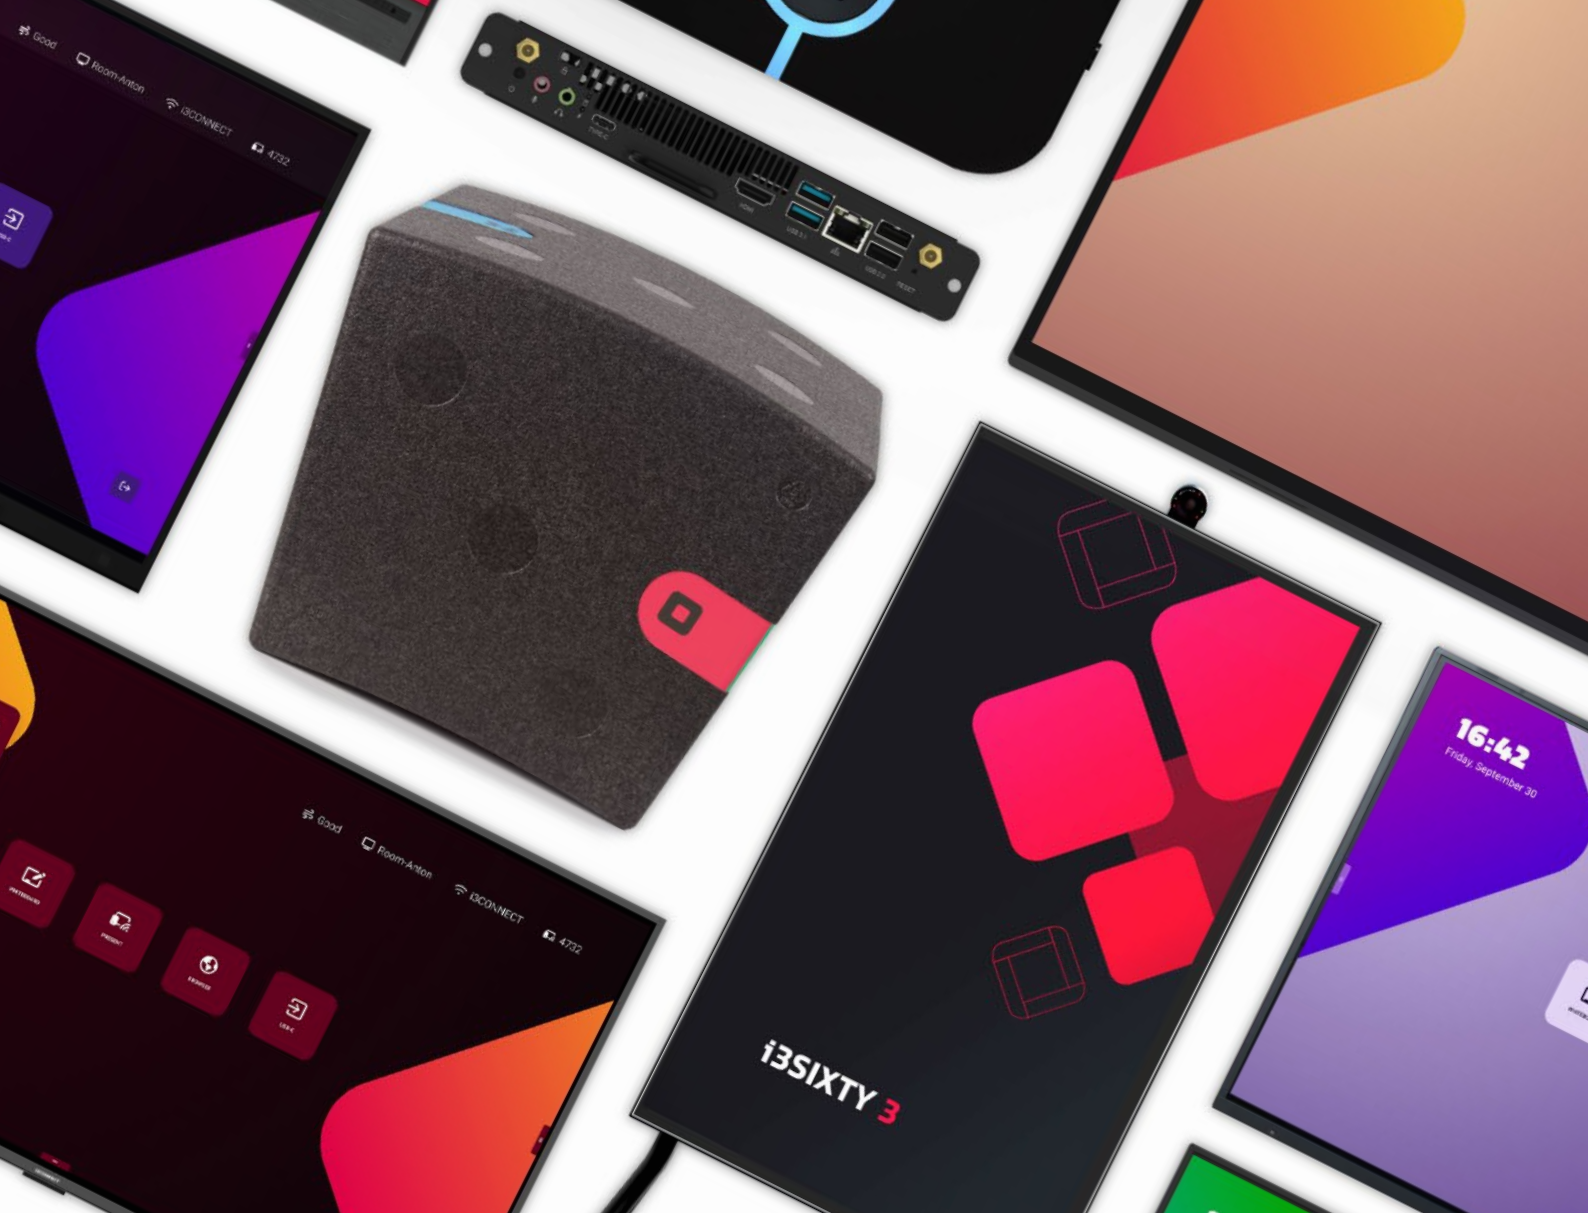

KEEP THE SCREEN, CHANGE THE SCENE WITH i3CONNECT OPS.

LET'S CONNECT

i3CONNECT HQ
Kleine Schaluinweg 7
3290 Diest, BELGIUM.
info@i3-connect.com
www.i3-connect.com

CONTACT US

Ready for the next step? Go ahead: click that big button, fill in the form and we'll get in touch with you for a demo.

[Contact us](#)