


**i3SIXTY 3**

SPINNING IDEAS INTO REALITY.

Now with access to your favourite Android apps, the i3SIXTY 3 boosts group collaboration and sparks creativity. Rotate it, roll it anywhere, work in the cloud and manage it remotely to keep spaces tidy and collaboration smooth. Plus, enjoy the pen-to-paper feel of capacitive touch technology in a mobile, space-efficient design.

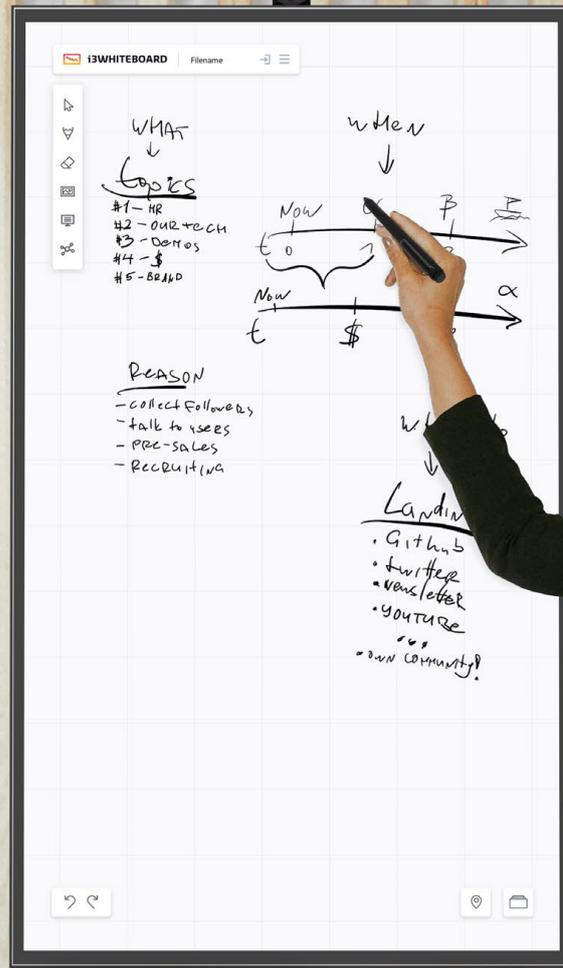

EDLA

Google certified device, quarterly security patches, Google Play store and all apps in the Google workspace.



Work faster

Take advantage of the advanced Octa-core Android engine for a lightning-fast experience.



90° screen rotation

Toggle between landscape and portrait mode to optimise visibility of your content.



Mobile stand

Turn any area into a collaborative workspace with the wheeled, mobile stand.



i3CONNECT Studio

All of our interactive displays are pre-installed with the easy-to-use and customisable i3CONNECT Studio.



Just one cable

Using just one USB-C cable, your personal device connects with the screen's display, audio speakers, touch, and camera.




Rotatable camera

Get the most out of your screen. With i3SIXTY 3 you can choose between portrait or landscape.



Capacitive touch

The capacitive touch technology creates an incredibly responsive and natural touch experience and a sleek, high-end aesthetic.

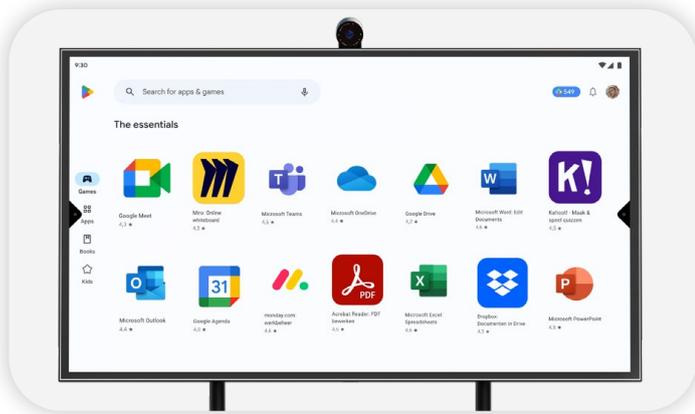

YOUR FAVOURITE APPS AT YOUR FINGERTIPS

Access the whole Google Play Store with our Google-enabled bundle, offering seamless access to thousands of apps. Customise your i3SIXTY 3 experience with easy, three-tap app installations, making it a versatile tool for any task.

MOBILITY MEETS VERSATILITY

Quickly adapt any space for collaboration with the i3SIXTY 3's mobile stand, complete with enlarged wheels and slim 50-inch or 65-inch display. Its assisted rotation feature allows you to optimise viewing angles, making even the smallest spaces into effective meeting points.



THE ULTIMATE PEN TO PAPER FEELING

The i3SIXTY 3's capacitive touch technology elevates touchscreen precision to mirror a pen-on-paper experience, making every tap and swipe quick and accurate. This intuitive technology supports multi-touch gestures, simplifying complex interactions and making the user experience feel natural and fluid. It's ideal for enhancing communication and collaboration, turning every session into an engaging experience.




POWERED BY i3CONNECT STUDIO SOFTWARE SUITE

i3CONNECT Studio is a powerful yet refreshingly simple software suite running on the i3CONNECT displays. Use whiteboarding, annotating, presenting, and video conferencing apps to conduct meetings, pitch ideas, lead workshops, teach or interact with your audience - in-person or remote. i3CONNECT Studio covers it all.

Developed in co-creation with our end-user community to answer your needs. Smoother, faster, and smarter than ever before, all brought to you in an intuitive and awesome design.

MANAGE REMOTELY WITH CORTEX

Managing the i3SIXTY remotely is no issue with Cortex. From configuration overviews to group or device-specific views, a few clicks is all it takes to update your settings for one, two, or a hundred devices. Are your displays offline? Not a problem. Thanks to the advanced command queuing feature, they'll update with your chosen configuration once they reconnect to Cortex.

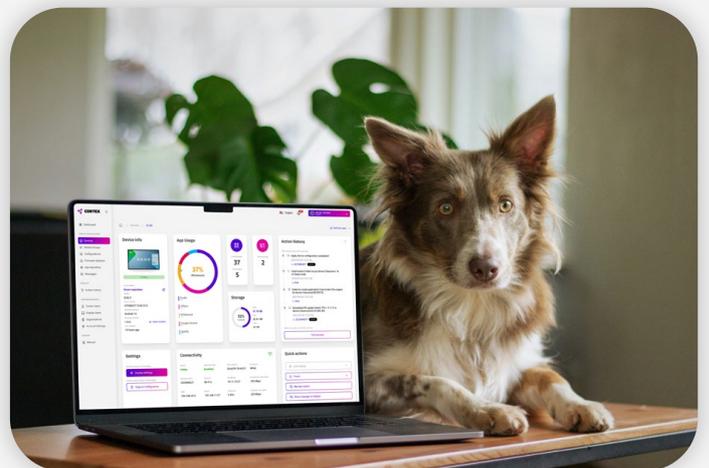

DISPLAY PROPERTIES		
Model	i3SIXTY 3 display 50"	i3SIXTY 3 display 65"
Series	i3SIXTY 3	
Product ID	10010630 (display) 10010675 (display + mobile stand)	10010631 (display)

DISPLAY SPECIFICATIONS		
Display Technology	Liquid Crystal Display (LCD)	
Backlight technology	Edge-LED backlight	Direct-LED backlight
Panel size	50"	65"
Display aspect ratio	16:9	
Native resolution	3840 x 2160 Pixels - 4K Ultra High Definition	
Brightness (typical)	450 cd/m ²	
Contrast ratio (typical)	4000:1	5000:1
Dynamic contrast ratio (typical)	500.000:1	500.000:1
Viewing angle	178° / 178°	
Color depth	1.07 billion colors (10 bit)	
Response time (typical)	8 ms	
Refresh rate	60 Hz (@ UHD)	
Surface	Optical bonded, tempered glass & anti-reflection	
Supported orientation	Landscape & Portrait	
Life time	50.000 hours 16/7	
Surface	3.2mm Tempered Optical bonded glass, anti-reflection, 9H/7Mohs	
Supported orientation	Landscape	
Life time	50.000 hours (16/7)	
Eye fatigue	Eye Protection & Blue light filter	

CONNECTIVITY	50"	65"
Video & audio input	2x HDMI 2.0 (1x ARC) 1x DP 1.2 1x USB-C Rear (DP1.2+Touch+65W+USB3.0) 2x USB-A Side (DP1.2+Touch+15W+USB3.0+LAN) 1x audio jack Analog Mic In	2x HDMI 2.0 (1x ARC) 1x DP 1.2 1x USB-C Rear (DP1.2+Touch+65W+USB3.0) 2x USB-A Side (DP1.2+Touch+15W+USB3.0+LAN)
Video & audio output	1x HDMI 2.0 Out 1x 3.5mm audio jack line Out 1x Digital RCA Out (SPDIF)	1x HDMI 2.0 Out 1x 3.5mm audio jack line Out 1x Digital RCA Out (SPDIF)
USB ports	2x USB 3.0 Type A 2x USB 2.0 Type A 2x USB 2.0 Type B Touch Out 1x USB 2.0 Type Micro (OTG)	2x USB 3.0 Type A 2x USB 2.0 Type A 2x USB 2.0 Type B Touch Out 1x USB 2.0 Type Micro (OTG)
Network connectivity	2x RJ45 (1x LAN In, 1x LAN Out) 1x RS232 Double WiFi module: 1x 802.11ax (WiFi6) + 1x 802.11ac (Wifi5)	2x RJ45 (1x LAN In, 1x LAN Out) 1x RS232 Double WiFi module: 1x 802.11ax (WiFi6) + 1x 802.11ac (Wifi5)
Other	1x TF card reader	1x TF card reader

OPERATIONAL SPECIFICATIONS		
Operating system	Android 13 EDLA Certified	
Memory	8GB RAM – 128 GB storage	
CPU	Octa-core ARM CPU	
Interactive touch	Technology: Capacitive Connection protocol: HID (Human Interface Device) Touch points: 20 simultaneous multi-touch points	
Speakers	2x 10 Watt	2x 20 Watt

PHYSICAL PROPERTIES		
VESA Mounting Pattern	400 x 400	600 x 400
Net weight	26,5 kg	34,2 kg
Packaged weight	32,3 kg	46,6 kg
Dimensions	1134 x 66 x 655 mm	1487 x 83 x 905 mm
Packaging dimensions	1265 x 160 x 743 mm	1657 x 185 x 1007 mm

ELECTRICAL PROPERTIES	50"		65"	
	Input Power	100V ~ 240V, 50/60 Hz		
Power Consumption	89.7 W		191.9 W	

ACCESSORIES			
Included	Quick start guide		
	Active stylus		
	Power cable EU		
	/		Wall mount

SOFTWARE FEATURES	
User interface	i3CONNECT STUDIO
Whiteboarding software	i3CONNECT WHITEBOARD
Annotation software	i3CONNECT WHITEBOARD
Screen casting software	i3CONNECT ALLSYNC wireless presenting
Web browser	Google Chrome
App store	i3CONNECT STORE & Google Play Store
Update Support	OTA
Conferencing Software	Zoom, Teams, Google Meet or others
Device Management	i3CONNECT CORTEX

REGULATORY INFORMATION

Type approval	CE, FCC, UKCA, EU Eco Design (ErP), RoHS.
----------------------	---

ENVIRONMENTAL CONDITIONS


Operating temperature	0°C ~ 40°C
Operating humidity	10% ~ 90% RH non-condensing
Operating maximal altitude	5 000 meters
Storage temperature	-20°C ~ 60°C
Storage humidity	10% ~ 90% RH non-condensing

WARRANTY

Standard warranty	2 years from shipment
Extended Warranty	For education entities: 5 years after registration, additional years available for purchase. For corporate entities: 5 years after registration, additional years available for purchase.

NOTICE

Exclusive design by i3CONNECT - subject to change. All dimensions and weights are approximate and subject to manufacturing tolerances

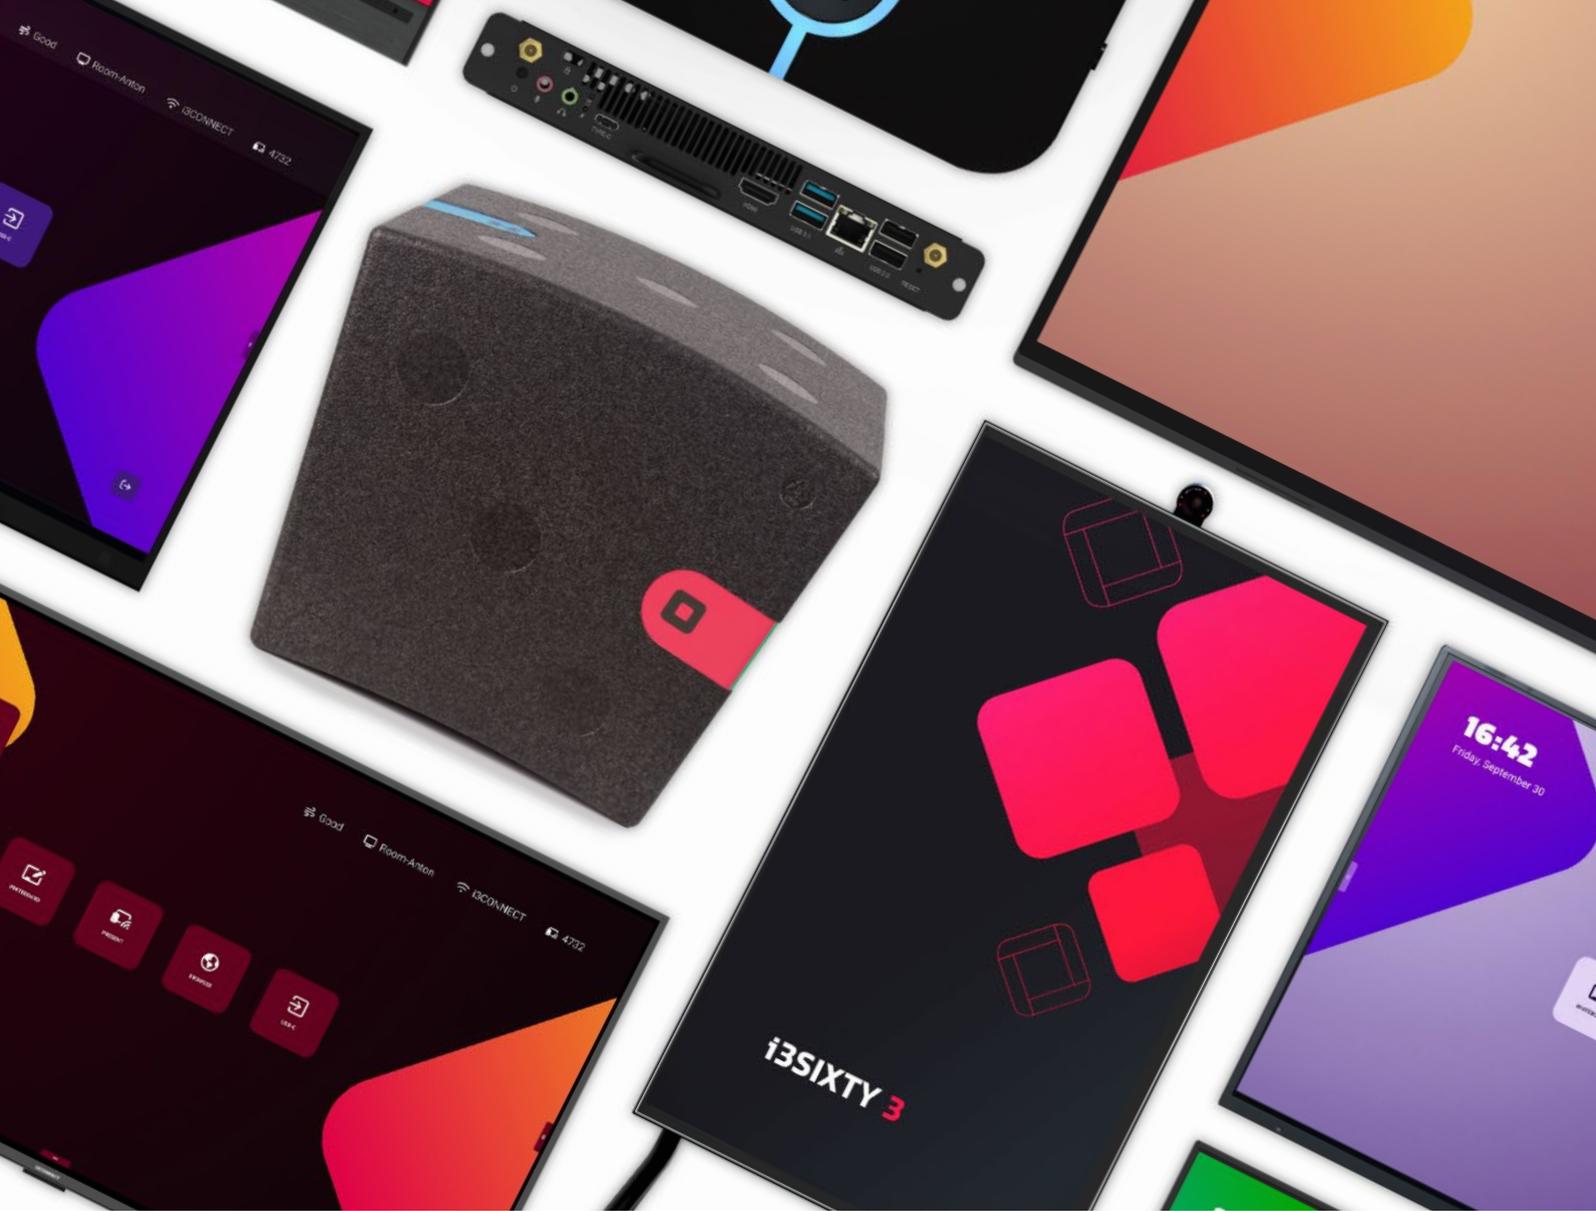

ARE YOU READY TO SPIN IDEAS INTO REALITY WITH THE i3SIXTY 3?

LET'S CONNECT

i3CONNECT HQ
Kleine Schaluinweg 7
3290 Diest, BELGIUM.
info@i3-connect.com
www.i3-connect.com

CONTACT US

Ready for the next step? Go ahead: click that big button, fill in the form and we'll get in touch with you for a demo.